

Product: RUBIN ROUND BASIC 300 LED 5000 PLX L-DOWN E 34 830 / H-70MM

Index: 19.3098.0079.34



Description

Surface mounted luminaire for LED sources. Luminaire body made from steel sheet, powder coated. Luminaire recommended for the interiors of traffic areas of housing estates.

Product information


Category	Surface mounted luminaires
Family	RUBIN ROUND BASIC LED
Name	RUBIN ROUND BASIC 300 LED 5000 PLX L-DOWN E 34 830 / H-70MM
Index	19.3098.0079.34



Light and electrical data



Light source	LED
Luminaire luminous flux [lm]	4202
Power of luminaire [W]	29,5
Light efficiency [lm/W]	142,4
Color of the light [K]	3000
CRI	>80
SDCM	3
Beam angle [°]	105
Photobiological risk class	RG0
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L90/B50
Operating temperature range [° C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	0,95

Mechanical data

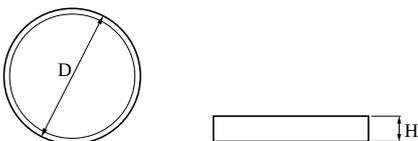

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	2
Dimensions D x H [mm]	Ø300 x 70

A graph of light

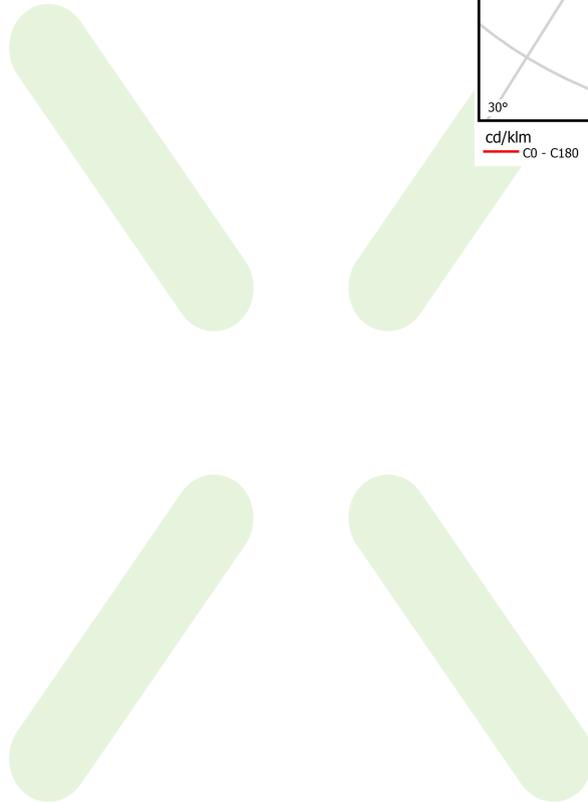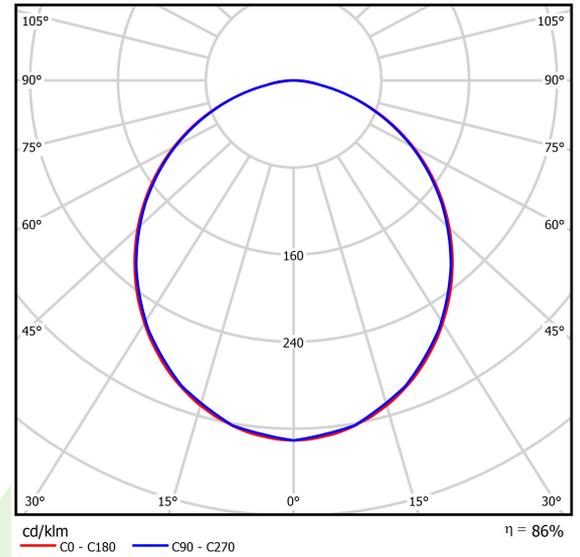

Note: The power shown refers to the whole system (tolerance +/- 10%). Power tolerance +/- 10%.
Specifications are subject to change. Pictures of the luminaires may differ from reality.
Date of last update: 07.10.2022